




DNC-SERİSİ ISO-15552 MANYETİK YASTIKLI PNÖMATİK SİLİNDİRLER

Normal Type
DNC-S

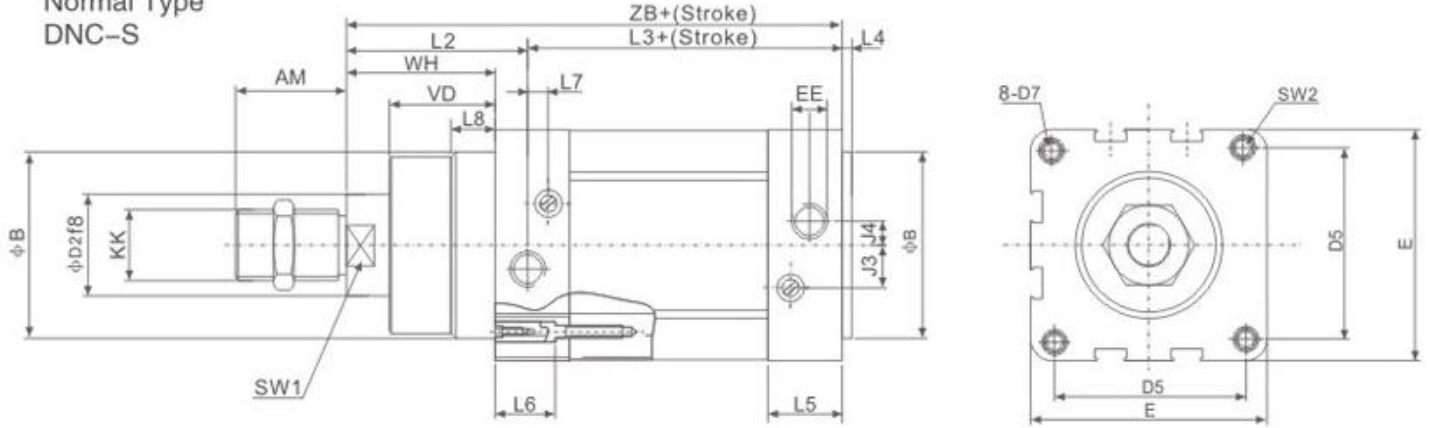

Bore	AM	B	D2	D5	D7	E	EE(G)	J3	J4	KK
32	22	30	12	32.5	M6	45	1/8	6	5.2	M10×1.25
40	24	35	16	38	M6	54	1/4	8	6	M12×1.25
50	32	40	20	46.5	M8	64	1/4	10	8.5	M16×1.5
63	32	45	20	56.5	M8	75	3/8	12.4	10	M16×1.5
80	40	45	25	72	M10	93	3/8	12.5	8	M20×1.5
100	40	55	25	89	M10	110	1/2	11.8	10	M20×1.5
125	54	60	32	110	M12	134	1/2	13	8	M27×2

L2	L3	L4	L5	L6	L7	L8	SW1	SW2	VD	WH	ZB
40	80	4	26	16	3.3	8	10	6	16	26	120
46	89	4	29.6	16	3.6	10	13	6	20	30	135
54	90	4	30	17	5.1	10	17	8	27	37	144
57	101	4	35.5	17	6.6	10	17	8	27	37	158
65	109	4	36	17	10.5	10	22	10	34.5	46	174
71	118	4	39	17	8	12.5	22	10	38	51	189
95	128	6	44.7	22	14	10	28	12	46	65	223

Bore	Standard Stroke	Buffer Stroke	Stroke Range
32		20	
40			
50	25 40 50 80		
63	100 125 160	22	10-2000
80	200 250 320		
100	400 500	32	
125		35	

Bore(mm)	32	40	50	63	80	100	125
Working Medium	Double Action						
Motion Pattern	Filtered Air						
Compression Pressure	1.5MPa						
Max.Operating Pressure	1.0MPa						
Min.Operating Pressure	0.1MPa						
Buffer	Air Buffer(Standard)						
ConditionTemperature	-5-70°C						
Operating Speed	50-800mm/s						
Port Size	G1/8"	G1/4"	G3/8"	G1/2"			