




TEJMAK

DNG-SERİSİ ISO-15552 MANYETİK PNÖMATİK SİLİNDİRLER

Bore(mm)	160	200	250	320
Motion Pattern	Double Action			
Working Medium	Air			
Fixed Type	Normal type FA type FB type CA type CB type LB type TC type			
Working Pressure Range	0.1-1.0MPa			
Ensured Pressure Resistance	1.5MPa			
Operating Temperature Range	-5-60℃			
Operating Speed Range	50-500mm/s			
Buffer Type	Adjustable Buffer			
Port Size	G3/4"		G1"	
Lubrication	Not required (Use Turbine oilISO Vg32 when necessary)			

Overall Dimensions

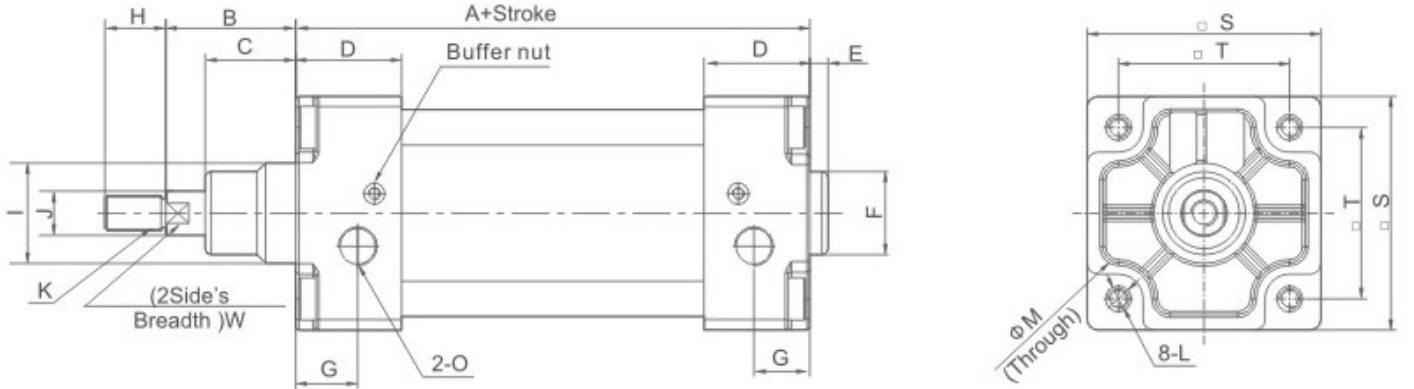

Bore	A	B	C	D	E	F	G	H	I	J	K	L
160	180	80	60	50	6	φ65	25	72	φ65	40	M36×2	M16
200	180	95	70	50	6	φ75	25	72	φ75	40	M36×2	M16
250	200	105	67	52	10	90	31	84	90	50	M42×2	M20
320	218	120	82	52	10	110	31	96	110	63	M48×2	M24

M	S	T	O
φ25dp30	180	140	G3/4"
φ25dp30	220	175	G3/4"
φ30	270	220	G1"
φ34	340	270	G1"