




TEKMAK



IT-SERİSİ ISO-15552 MANYETİK YASTIKLI PNÖMATİK SİLİNDİRLER

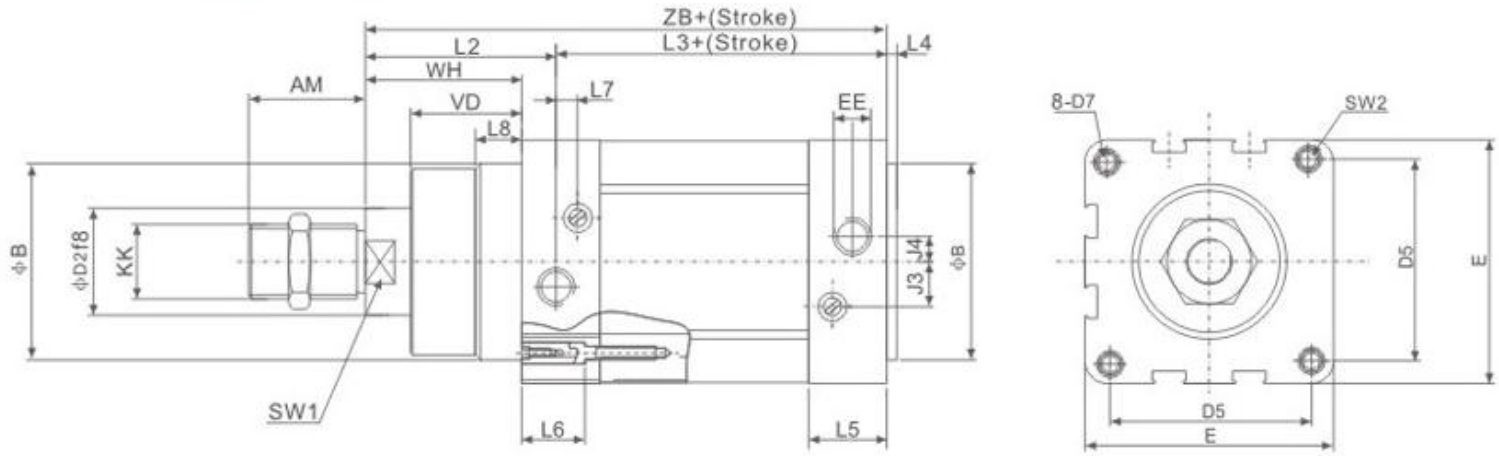


Bore	AM	B	D2	D5	D7	E	EE(G)	J3	J4	KK
32	22	30	12	32.5	M6	45	1/8	6	5.2	M10×1.25
40	24	35	16	38	M6	54	1/4	8	6	M12×1.25
50	32	40	20	46.5	M8	64	1/4	10	8.5	M16×1.5
63	32	45	20	56.5	M8	75	3/8	12.4	10	M16×1.5
80	40	45	25	72	M10	93	3/8	12.5	8	M20×1.5
100	40	55	25	89	M10	110	1/2	11.8	10	M20×1.5

L2	L3	L4	L5	L6	L7	L8	SW1	SW2	VD	WH	ZB
40	80	4	26	16	3.3	8	10	6	16	26	120
46	89	4	29.6	16	3.6	10	13	6	20	30	135
54	90	4	30	17	5.1	10	17	8	27	37	144
57	101	4	35.5	17	6.6	10	17	8	27	37	158
65	109	4	36	17	10.5	10	22	10	34.5	46	174
71	118	4	39	17	8	12.5	22	10	38	51	189



SENSÖR KANALI



Bore(mm)	32	40	50	63	80	100
Working Medium	Double Action					
Motion Pattern	Fitered Air					
Compression Pressure	1.5MPa					
Max.Operating Pressure	1.0MPa					
Min.Operating Pressure	0.1MPa					
Buffer	Air Buffer(Standard)					
ConditionTemperature	-5-70°C					
Operating Speed	50-800mm/s					
Port Size	G1/8"	G1/4"	G3/8"	G1/2"		