



32 SERİSİ / 32 SERIES


3 Yollu 2 Konumlu
3 Ports 2 Positions




TAY-32
Normalde Kapalı
Normally Closed



TAA-32
Normalde Kapalı
Normally Closed




TAP-32
Normalde Kapalı
Normally Closed

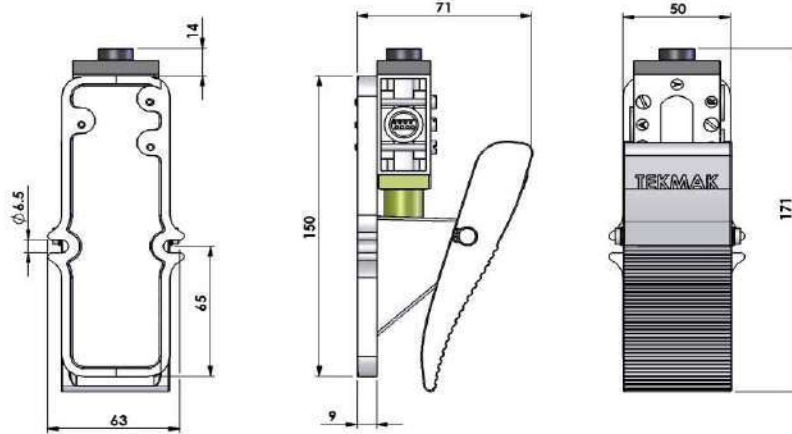


52-53 SERİSİ / 52-53 SERIES


5 Yollu 2 Konumlu
5 Ports 2 Positions
5 Yollu 3 Konumlu
5 Ports 3 Positions




TAY-52
Normalde Kapalı
Normally Closed




TAA-52
Normalde Kapalı
Normally Closed

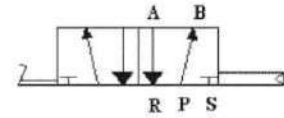


TAP-52
Normalde Kapalı
Normally Closed

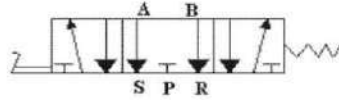




TAYA-53/A
Normalde Açık
Normally Open

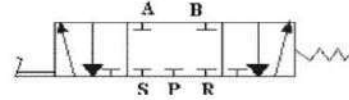

TAYA-53/K
Normalde Kapalı
Normally Closed

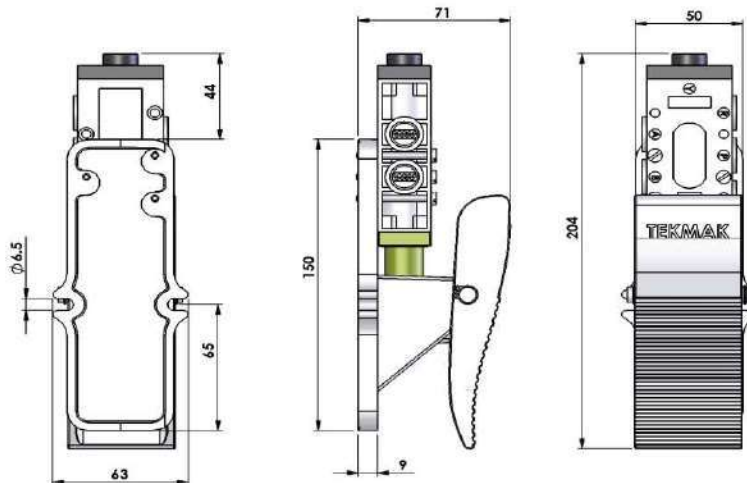

PEDAL KUMANDALI / FOOT CONTROL

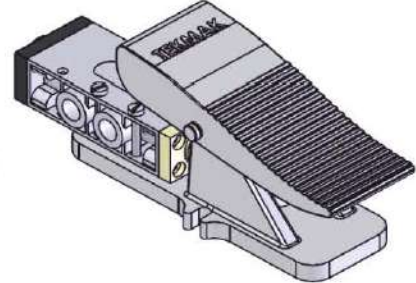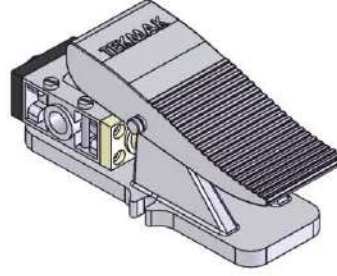

**AYAD-YAY (3 YOLLU 2 KONUMLU)
FOOT-SPRING (3 PORTS 2 POSITIONS)**

1/4"

TAY-32



**AYAK KUMANDALI (3 YOLLU 2 KONUMLU)
FOOT CONTROL (3 PORTS 2 POSITIONS)**

1/4"


TAA-32



**AYAK KUMANDALI-HAVA (3 YOLLU 2 KONUMLU)
FOOT CONTROL (3 PORTS 2 POSITIONS)**

1/4"


TAP-32



**AYAK-YAY (5 YOLLU 2 KONUMLU)
FOOT-SPRING (5 PORTS 2 POSITIONS)**

1/4"


TAY-52



**AYAK KUMANDALI (5 YOLLU 2 KONUMLU)
FOOT CONTROL (5 PORTS 2 POSITIONS)**

1/4"


TAA-52



**AYAK KUMANDALI-HAVA (5 YOLLU 2 KONUMLU)
FOOT CONTROL (5 PORTS 2 POSITIONS)**

1/4"


TAP-52



**AYAK-YAY-AYAK NORMALDE AÇIK
(5 YOLLU 3 KONUMLU)
FOOT SPRING NORMALLY OPEN
(5 PORTS 3 POSITIONS)**

1/4"

TAYA-53/A



**AYAK-YAY-AYAK NORMALDE KAPALI
(5 YOLLU 3 KONUMLU)
FOOT-SPRING NORMALLY CLOSED
(5 PORTS 3 POSITIONS)**

1/4"

TAYA-53K

Model	TAY-32	TAA-32	TAP-32	TAY-52	TAA-52	TAP-52	TAYA-53/A	TAYA-53/K
Çalışma Ortamı Operating Environment	40 Mikron Filtreli Hava 40 Micron Filtered Air							
Basınç Aralığı (kgf/cm ²) Pressure Range	2 - 8							
Çalışma sıcaklığı (°C) Operating Temperature	0 - 60							
Yol / Konum Number of Positions ports	3 / 2	3 / 2	3 / 2	5 / 2	5 / 2	5 / 2	5 / 3	5 / 3
Valf Konumu Valve Function	N.K* N.C*						N.A* N.O*	N.K* N.C*
Connection Port	Rc - 1/4							
Yağlama Lubrication	Serbest Yağlama Lubrication free type							

* N.K / N.A : Normalde Kapalı / Normalde Açık

* N.C / N.O : Normally Closed / Normally Open

Sipariş Kodu / Order Codu				
2	T	AYA	53	K
Ürün Grubu Product Group	Tekmak	Kumanda Şekli Operation	Yol/Konum Number of P. ports	Konumu Valve function
1-Solenoid Valf		AY		
2-Pnömatik Valf		AA	32	A : AÇIK / OPEN
3-Pnömatik Silindir		AP	52	K-KAPALI / CLOSED
		AYA	53	

Sipariş nasıl verilir ? / How to Order ?
 Model - Bobin Voltajı / Model - Coil Voltage
 2-TAYA-53/K 220V / 2-TAYA-53/K 220V AC