




KOL KUMANDALI / LEVER CONTROL

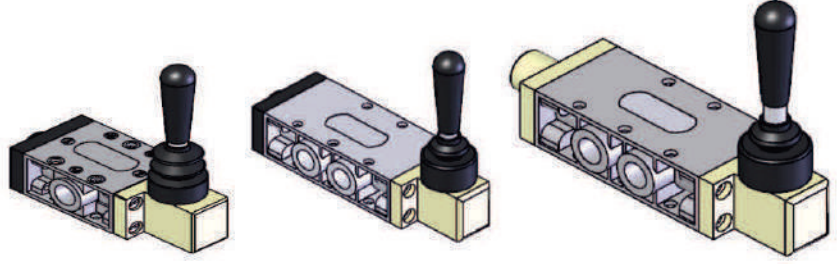

**KOL KUMANDALI-YAY (3 YOLLU 2 KONUMLU)
LEVER CONTROL-SPRING (3 PORTS 2 POSITIONS)**

1/4"


TKY-32



**KOL KUMANDALI (3 YOLLU 2 KONUMLU)
LEVER CONTROL (3 PORTS 2 POSITIONS)**

1/4"


TKK-32



**KOL KUMANDALI-HAVA (3 YOLLU 2 KONUMLU)
LEVER CONTROL-AIR (3 PORTS 2 POSITIONS)**

1/4"


TKP-32



**KOL KUMANDALI-YAY (5 YOLLU 2 KONUMLU)
LEVER CONTROL-SPRING (5 PORTS 2 POSITIONS)**

1/4"


TKY-52



**KOL KUMANDALI (5 YOLLU 2 KONUMLU)
LEVER CONTROL (5 PORTS 2 POSITIONS)**

1/4"


TKK-52



**KOL KUMANDALI-HAVA (5 YOLLU 2 KONUMLU)
LEVER CONTROL-AIR (5 PORTS 2 POSITIONS)**

1/4"


TKP-52



**KOL KUMANDALI / NORMALDE AÇIK
(5 YOLLU 3 KONUMLU)
LEVER CONTROL NORMALLY OPEN
(5 PORTS 2 POSITIONS)**

1/4"


TKSK-53/A



**KOL KUMANDALI / NORMALDE KAPALI
(5 YOLLU 3 KONUMLU)
LEVER CONTROL / NORMALLY CLOSED
(5 PORTS 2 POSITIONS)**

1/4"


TKYK-53/K



**KOL KUMANDALI-YAY / NORMALDE AÇIK
(5 YOLLU 3 KONUMLU)
LEVER CONTROL-SPRING NORMALLY OPEN
(5 PORTS 2 POSITIONS)**

1/4"


TKYK-53/A



**KOL KUMANDALI-YAY / NORMALDE KAPALI
(5 YOLLU 3 KONUMLU)
LEVER CONTROL-SPRING / NORMALLY CLOSED
(5 PORTS 2 POSITIONS)**

1/4"

TKYK-53/K

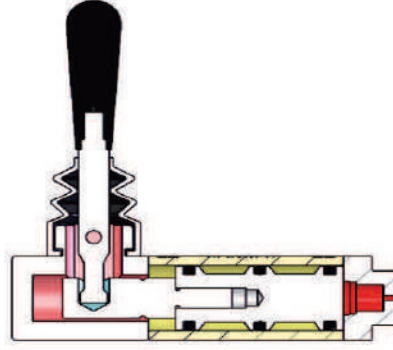

Model	TKY-32	TKK-32	TKP-32	TKY-52	TKK-52	TKP-52	TKSK-53/A	TKSK-53/K	TKYK-53/A	TKYK-53/K
Çalışma Ortamı Operating Environment	40 Mikron Filtreli Hava 40 Micron Filtered Air									
Basınç Aralığı (kgf/cm²) Pressure Range	2 - 8									
Çalışma sıcaklığı (°C) Operating Temperature	0 - 60									
Yol / Konum Number of Positions ports	3 / 2	3 / 2	3 / 2	5 / 2	5 / 2	5 / 2	5 / 3	5 / 3	5 / 3	5 / 3
Valf Konumu Valve Function	N.K*						N.A*	N.K*	N.A*	N.K*
	N.C*						N.O*	N.C*	N.O*	N.C*
Rakor Bağlantısı Connection Port	Rc - 1/4									
Yağlama Lubrication	Serbest Yağlama Lubrication free type									

* N.K / N.A : Normalde Kapalı / Normalde Açık

* N.C / N.O : Normally Closed / Normally Open

Sipariş Kodu / Order Codu				
2	T	KYK	53	K
Ürün Grubu Product Group	Tekmak	Kumanda Şekli Operation	Yol/Konum Number of P. ports	Konumu Valve function
1-Solenoid Valf		KY		
2-Pnömatik Valf		KK	32	A : AÇIK / OPEN
3-Pnömatik Silindir		KP	52	K-KAPALI/ CLOSED
		KSK	53	
		KYK		


Sipariş nasıl verilir ? / How to Order ?

Model - Bobin Voltajı / Model - Coil Voltage


2-TKYK-53/K 220V / 2-TKYK-53/K 220V AC

32 SERİSİ / 32 SERIES


3 Yollu 2 Konumlu
3 Ports 2 Positions




TKY-32
Normalde Kapalı
Normally closed



TKK-32
Normalde Kapalı
Normally closed

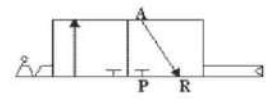


TKP-32
Normalde Kapalı
Normally closed

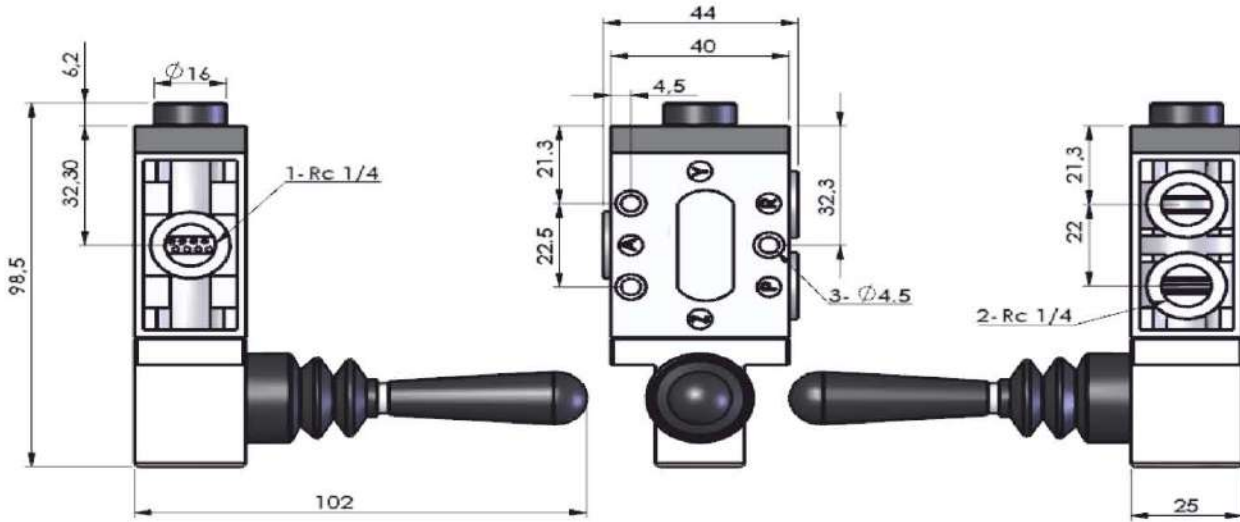

52 SERİSİ / 52 SERIES


5 Yollu 2 Konumlu
5 Ports 2 Positions




TKY-52
Normalde Kapalı
Normally closed



TKK-52
Normalde Kapalı
Normally closed




TKP-52
Normalde Kapalı
Normally closed

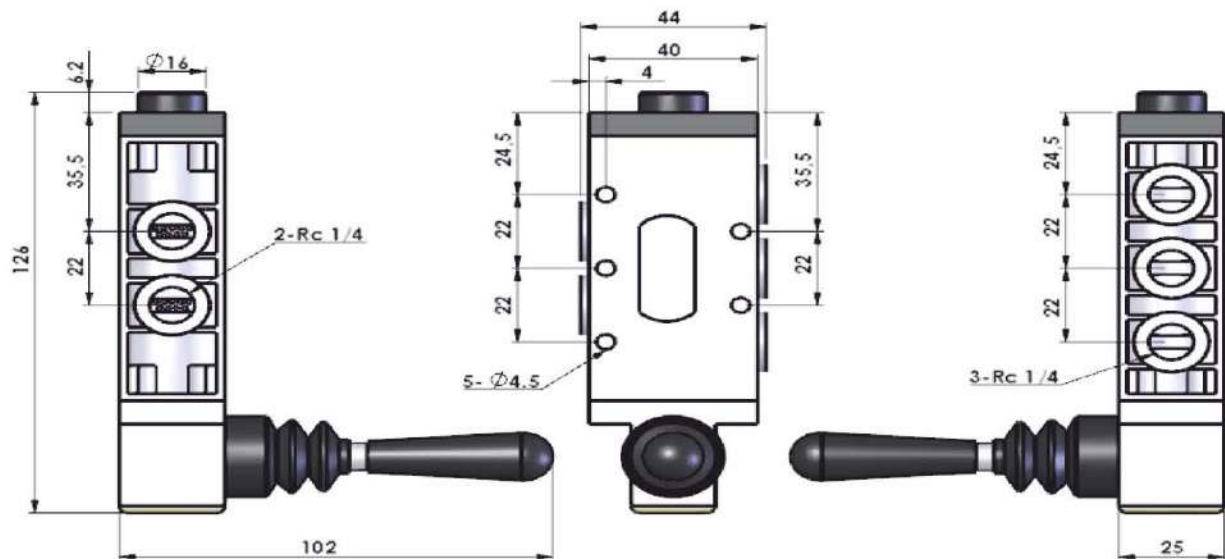


53 SERİSİ / 53 SERIES



5 Yollu 3 Konumlu
5 Ports 3 Positions




TKSK-53/A
Normalde Açık
Normally Open



TKSK-53/K
Normalde Kapalı
Normally Closed

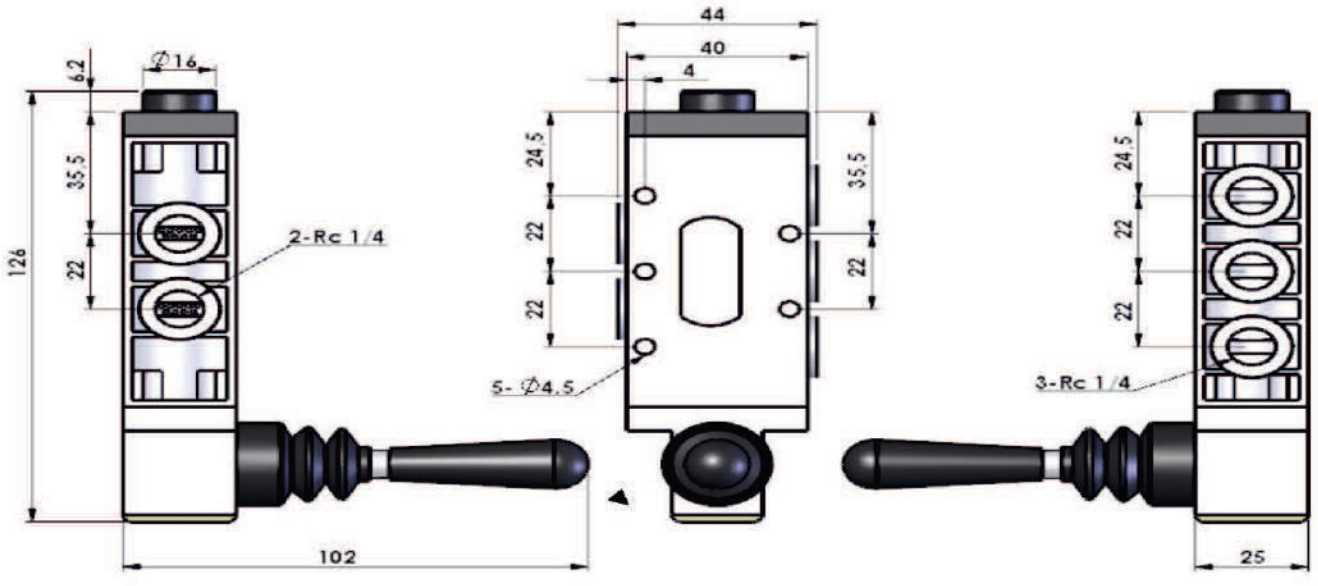

TKYK-53/A
Normalde Açık
Normally Open

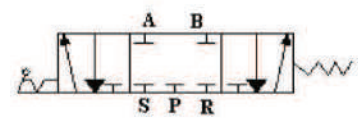

TKYK-53/K
Normalde Kapalı
Normally Closed

